539,958

Rec'd PCT/PT® 17 JUN 2005

(12) INTERNATIONAL AL. ACATION PUBLISHED UNDER THE PATENT C.

ERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



- I HATAL EKANTUELIT OLGUBEKÎNÎ DERN CELU CUCA LU TIY ERALE DINAS SULLE MELL STATE MEL DOLUMÎ ÎMPÎ HAY TATAL

(43) International Publication Date 8 July 2004 (08.07.2004)

PCT

(10) International Publication Number WO 2004/056242 A1

(51) International Patent Classification7:

A47F 3/04

(21) International Application Number:

PCT/GB2003/005459

(22) International Filing Date:

15 December 2003 (15.12.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 523377

20 December 2002 (20.12.2002) NZ

(71) Applicant (for all designated States except US): CAD-BURY CONFECIONERY LIMITED [NZ/NZ]; 494 Rosebank Road, Avondale, Auckland (NZ).

(72) Inventors; and


(75) Inventors/Applicants (for US only): ROSS, Darryn

[NZ/NZ]; 9 Klondyke Drive, Christchurch (NZ). STU-ART, Rod [NZ/NZ]; 168 Cumnor Terrace, Christchurch (NZ). BISSETT, Andrew [NZ/NZ]; 18b/125 The Strand, Parnell, Auckland (NZ).

- (74) Agent: WARD, David, I.; Marks & Clerk, Alpha Tower, Suffolk Street Queensway, Birmingham B1 1TT (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: CHILLER UNIT

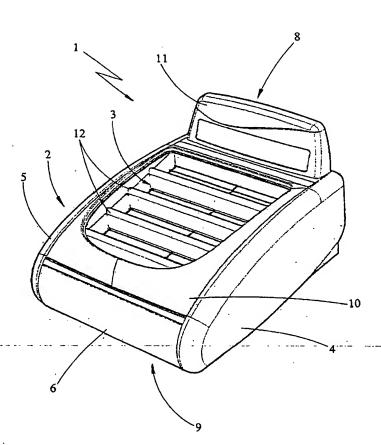

(57) Abstract: The invention provides an open topped refrigeration unit (1) which includes an outer case (2) having internal walls (4,5,6,7) and a base panel (19) defining an internal compartment (3), a refrigerated air generator (449, a duct (46), and a skirt (10). The duct (46) directs chilled air generated by the refrigerated air generator (44) around the internal compartment (3) and the skirt (10) is adapted to frame the open top of the internal compartment (3) and to direct the chilled air flow into the internal compartment (3).